



VRLA BATTERY FOR ENERGY STORAGE

RZE6-440WHR

RZE6-440WHR VRLA battery uses AGM technology and high-purity raw materials. It has good high power discharge, floating backup and fastcharging performance. It is mainly used in UPS/EPS standby power supply systems. It can backup power in poor operation environment.

Main Applications

- ▶ UPS units
- ▶ Data center
- ▶ Telecom & Medical Equipments
- ▶ EPS units


Benefits

- ▶ Long life according to EUROBAT
- ▶ Classification Maximum charge efficiency
- ▶ High gas recombination efficiency
- ▶ Low self-discharge rate
- ▶ Horizontal or vertical installization

Standards

- ▶ IEC 60896-21/22
- ▶ JIS C8704-1/2
- ▶ EUROBAT guide

Drawing

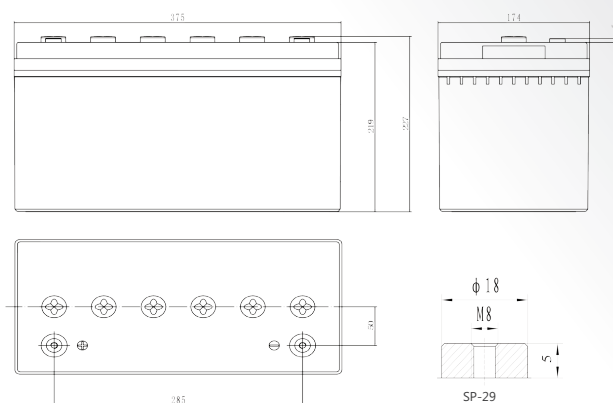

Technical Parameters

Battery Model		SPG12-440W			
Design Life (years, 25°C)	12				
Capacity (Ah, 25°C)	10min (1.60V)	15min (1.67V)	1HR (69A, 1.75V)	10HR 11.5A, 1.80V)	
	528W/cell	440W/cell	69Ah	115Ah	
Dimensions (mm)	Length	Width	Height	Total Height	
	375	174	219	227	
Approx. Weight (kg)	36.2				
Reference Internal Resistance (m ⁺)	3.70 (fully charged @ 25°C)				
Maximum Discharge Current (A/5 Sec.)	1265				
Self-Discharge (25°C)	≤ 2% per months				
Charge Voltage (V/cell, 25°C)	Equalizing voltage			Float voltage	
	2.40(-3.5mV/°C/cell), max charge current: 34.5A			2.27(-3.5mV/°C/cell)	
Short Circuit Current (A)	3200				

Discharge Data


Constant Current Discharge Data (25°C, A)

End Voltage (V/cell)	min						h							
	10	15	20	25	30	45	1	1.5	2	3	4	5	6	10
1.60	300	250	222	188	145	112	79.3	61.0	48.4	34.7	26.8	22.5	19.2	12.8
1.65	286	242	212	180	140	108	76.8	59.3	47.0	33.6	26.0	21.8	18.8	12.5
1.67	273	230	204	175	137	105	74.6	58.3	46.3	33.0	25.7	21.5	18.6	12.4
1.70	258	216	193	166	128	102	71.7	57.2	45.4	32.6	25.3	21.2	18.3	12.0
1.75	242	200	178	154	120	96.0	69.0	55.5	44.2	31.6	24.7	20.7	17.8	11.8
1.80	223	184	168	146	118	89.0	65.7	53.4	42.7	30.7	24.0	20.2	17.5	11.5

Constant Power Discharge Data (25°C, W/cell)

End Voltage (V/cell)	min						h							
	10	15	20	25	30	45	1	1.5	2	3	4	5	6	10
1.60	528	464	392	340	290	218	160	132	99.5	66.2	57.8	47.0	40.0	26.4
1.65	513	450	378	330	280	212	154	128	96.6	64.5	56.6	45.7	39.4	26.2
1.67	502	440	372	322	273	207	153	125	94.2	63.3	55.3	44.6	38.8	25.8
1.70	490	420	363	316	266	204	148	123	92.6	62.3	54.3	44.0	38.2	25.6
1.75	477	410	348	305	256	198	144	120	90.7	60.4	52.6	43.0	37.5	25.2
1.80	458	400	337	294	245	190	138	115	87.6	58.5	51.0	41.8	36.6	24.7

Performance Curve

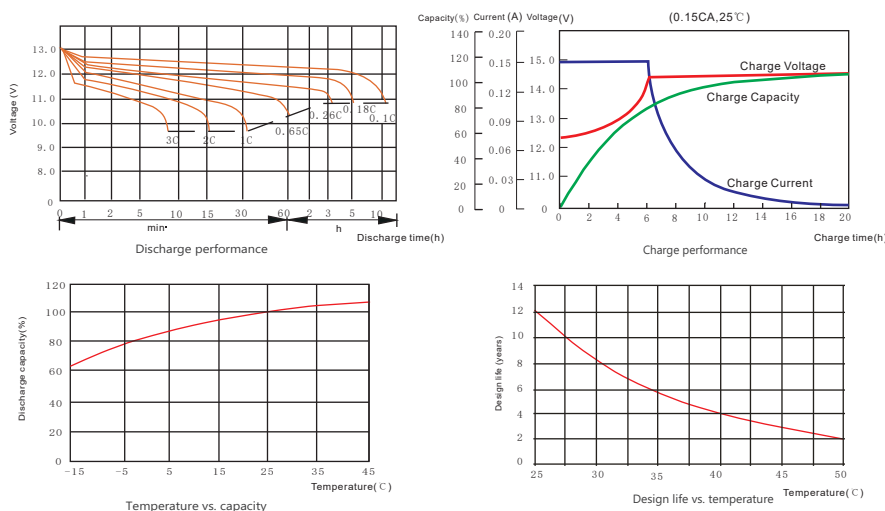

Declaration: This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact Rizon Technologies for the latest information.

Products specifications described herein are subject to change without prior notification.